



Northern Virginia Transportation Authority
The Authority for Transportation in Northern Virginia

PLANNING AND PROGRAMMING COMMITTEE

Monday, March 21, 2022, 5:00 p.m.

NVTA Office

3040 Williams Drive, Suite 200

Fairfax, Virginia 22031

The meeting will be livestreamed on [NVTA's YouTube Channel](#)

AGENDA

- I. Call to Order/Welcome** Chair

Action

- II. Summary Notes of November 29, 2021, Meeting**
Recommended action: Approve meeting notes

Discussion/Information

- III. FY2022-2027 Six Year Program: Status Update** Mr. Jasper, Principal,
Planning and Programming
- IV. TransAction: Status Update** Mr. Jasper, Principal,
Planning and Programming
- V. NVTA Update** Ms. Backmon, CEO

Adjournment

- VI. Adjourn**

Next Meeting: TBD



Northern Virginia Transportation Authority

The Authority for Transportation in Northern Virginia

PLANNING AND PROGRAMMING COMMITTEE

Monday, November 29, 2021, 5:00 p.m.
Northern Virginia Transportation Authority

SUMMARY NOTES

I. Call to Order/Welcome

- Chairman Wilson called the meeting to order at 5:05 p.m.
- Attendees:
 - **PPC Members:** Mayor Wilson (City of Alexandria); Council Member Snyder (City of Falls Church); Mayor Rishell (City of Manassas Park); Chair Wheeler (Prince William County).
 - **Other NVTA Members:** None.
 - **NVTA Staff:** Monica Backmon (CEO); Keith Jasper (Principal); Sree Nampoothiri (Senior Transportation Planner).
 - **Jurisdiction/Agency Staff:** Proceedings were livestreamed on YouTube Live.
 - **Others:** Dalia Leven (Cambridge Systematics).

Action

II. Summary Notes of November 1, 2021, Meeting

- The November 1, 2021, Planning and Programming Committee meeting summary was approved unanimously.

III. Approval of Performance Measure Weightings for TransAction Update

- Mr. Jasper noted the development and approval process of weights for performance measures. After considering Committee recommendations, Authority will be requested to approve weights at their December 9th meeting.
- Mr. Jasper explained how the goals and core values relate. While goals are what we want to achieve, core values are how we achieve the goals.
- Mr. Jasper noted that these measures are primarily used for evaluating the performance of TransAction plan. Therefore, the weights of measures and their relative differences will influence the final TransAction Project Ratings. This weighted performance measure is the only rating used in TransAction. For Six Year Program (SYP) funding, this is one among a set of measures among the quantitative measures. The four selection criteria for SYP are – i) eligibility, ii) quantitative measures including Congestion Reduction Relative to Cost (CRRC) rating,

TransAction rating, and Long-Term Benefit, iii) qualitative measures, and iv) public comments.

- In response to Ms. Hynes' question on definition of severe congestion, Ms. Leven responded that it is the congestion that is two to two and half times the normal congestion. Ms. Hynes added that Smart Scale has a severe congestion measure and requested to try to be consistent as much as possible.
- Ms. Leven answered affirmatively to Chair Wheeler's question on use of definition of equity emphasis areas (EEA) by the Metropolitan Washington Council of Government/Transportation Planning Board (MWCOG/TPB) for analyses. Ms. Hynes requested to look at EEA definitions specific to Northern Virginia since the poverty level and other factors could be different from the entire Metro Washington region. She added that the MWCOG/TPB has prepared such region-specific EEAs.
- Mayor Rishell enquired about the methodology to measure transportation redundancy. Ms. Leven explained that this measure is in response to the homeland security requirement in Virginia Code related to HB599 (2012) and is measured at the additional delays when a 10% surge of traffic happens during the peak travel times.
- In response to Chair Wheeler's question on whether additional transit will be able to provide redundancy, Ms. Leven noted that it is possible if the transit is providing extra capacity, potentially with additional routes. Ms. Hynes added that improvements such as signal improvements, reversible lanes, etc. would also be helpful.
- Mr. Jasper explained the process for weighting performance measures and noted that the staff is looking for policy direction from the Committees and the Authority. Ms. Backmon added that the staff and the attorneys can advise whether the final weighting is consistent with Virginia Code that requires NVRTA to give priority to projects that reduce congestion relative to cost.
- After noting the individual members' inputs, an average weight for each performance measure was calculated.
- In response to Chair Wheeler's question on access to jobs, Ms. Leven noted that it is the average number of jobs accessible by households of the specific group of population (general or EEA) by auto in 45 minutes, transit in 60 minutes, and bike in 30 minutes. She added that the access can be improved by reducing congestion, have jobs and houses close by, adding more transit or bike facilities.
- Council Member Snyder noted that individual committee members may differ on one or other measure but overall, the weights reflect the multimodal approach the Authority strives for while staying within the Virginia Code requirements.
- Mayor Rishell opined that though continuing to build highways is not a sustainable solution in the longer term, there are occasions when a strategic approach to road building is important for economic development, especially for outer municipalities. She added that she has concerns if the weights skew against such an approach to road building.
- Ms. Leven noted that the future development as anticipated by jurisdictions and captured in the cooperative forecasts of population, employment, and households developed in collaboration with MWCOG, is utilized in the Plan development and analyses.

- Council Member Snyder made a motion, and Chair Wheeler seconded, to recommend the weights for the ten performance measures to the Authority. The motion was passed by the Committee with Mayor Rishell abstaining.
- The performance measures weightings recommended by the PPC are:

| Goal | | Performance Measure | Recommended Weight |
|---------------|----|--|--------------------|
| Mobility | A1 | Total Person-Hours of Delay in autos | 12.0 |
| | A2 | Total Person-Hours of Delay on Transit (incl. HOV) | 11.0 |
| | B1 | Duration of Severe Congestion | 9.0 |
| | B2 | Transit person-miles in dedicated/priority ROW | 9.0 |
| Accessibility | C1 | Access to jobs by car, transit, and bike | 9.0 |
| | C2 | Access to jobs by car, transit, and bike for EEA populations | 10.0 |
| | D1 | Quality of access to transit and the walk/bike network | 14.0 |
| Resiliency | E1 | Potential for safety and security improvements | 9.0 |
| | F1 | Vehicle Emissions | 12.0 |
| | G1 | Transportation System Redundancy | 5.0 |

Discussion/Information

IV. **TransAction: Update on Scenario Definitions**

- Mr. Jasper noted that the team is looking forward to the Committee’s feedback on the definitions of the four scenarios the team is contemplating. He added that these scenarios are potential alternate futures to understand the uncertainties and sensitivity of the Plan, and are not intended to represent preferred visions of the future.
- Four scenarios are proposed for inclusion in the TransAction update process. Ms. Leven described each briefly, and asked for Committee feedback on a few specific points for each:
 - Pandemic-created ‘New Normal’
 - In response to a question from Ms. Leven, Ms. Hynes noted that the decline in transit ridership should be considered short-term and all transit trips, not just commuting, need to be considered.
 - In response to a question from Mayor Rishell, Ms. Leven noted that an example of potential land use change is the reduction of need for office space due to increased telecommuting.
 - Transportation Technology
 - In response to Council Member Snyder’s question on microtransit, Ms. Leven noted that it will fit in this scenario, especially in conjunction with automated and electric vehicles. Ms. Hynes and Mayor Rishell supported this.

- Transportation Incentives/Pricing
 - In response to Mayor Rishell’s question on equity perspective for pricing, Ms. Leven agreed that in-depth studies need to be conducted before deciding on the implementation details of pricing mechanisms.
 - Mayor Wilson and Ms. Hynes pointed to the importance of incentives and using a combination of different aspects of multiple scenarios.
- Climate Change
 - Ms. Leven offered two potential approaches to this scenario. The first is to evaluate what would happen if specific pieces of infrastructure were lost, due to things like flooding. The second is to combine aspects of the other three scenarios, to determine their joint impact on emissions.
 - Council Member Snyder pointed to the need for understanding the climate change goals, including looking at the goals set by MWCOG for greenhouse gas (GHG) emission, and developing the scenario accordingly. Mr. Jasper responded by saying that the team is waiting to see the results of the Climate Change Mitigation study by the TPB before deciding how to define the climate change scenario in order to avoid duplicating TPB’s work.
 - The Committee was interested in a scenario that would combine outcomes of these other three, but recommended waiting to see said outcomes before finalizing this approach.

V. NVTA Update

- Ms. Backmon noted that the next Authority meeting is scheduled for December 9th. The Authority will take action on the weighting of the performance measures for TransAction. The Authority will also receive an update on the legislative program.

Adjournment

VI. Adjourn

- The next meeting will be decided as needed. The meeting adjourned at 6:45 p.m.

Task 1.5 Technical Memorandum

Performance Measures Methodology

February 2022

The Northern Virginia Transportation Authority (NVTA) is a regional body that is focused on delivering transportation solutions and value for Northern Virginia's transportation dollars by bringing NoVA jurisdictions and agencies together to plan and program regional multimodal transportation projects focused on relieving congestion. As shown in Figure 1, NVTA has two main functions in the planning and programming of the multimodal transportation network in Northern Virginia. TransAction is Northern Virginia's long range multimodal transportation

Figure 1: NVTA's Planning and Programming Process



plan, which is a financially and geographically unconstrained plan, that is updated every five years. As part of TransAction, NVTA analyzes the regional impacts of a slate of multimodal transportation projects using a set of performance measures designed to capture the range of potential benefits of all types of improvements.

NVTA also is responsible for allocating regional transportation funds to specific projects as part of the programming process. Every two years, NVTA updates their Six Year Program to include projects selected to receive funding. These programming decisions are also based, in part, on an evaluation of candidate projects based on the same set of performance measures used in TransAction.

TransAction is currently being updated, which includes revisions to the TransAction Vision, Goals, Objectives, and Performance Measures. These new performance measures will be used to analyze the impacts of transportation projects as part of TransAction, and for at least the next three Six Year Program evaluations beginning with the FY2022-2027 Six Year Program. This memo outlines the methodology that is being used to calculate each of the ten performance measures based on results of the modeling process and/or other inputs, and how they will be combined in order to develop a combined TransAction rating.

Performance Measures

On November 18, 2021, NVTA approved the goals, objectives, and ten performance measures as shown in Table 1.

Table 1: Approved Goals, Objectives and Performance Measures

| Goal | Objective | Performance Measure |
|--|--|--|
| Mobility: Enhance quality of life of Northern Virginians by improving performance of the multimodal transportation system | A. Reduce congestion and delay* | A1. Total Person-Hours of Delay in autos |
| | | A2. Total Person-Hours of Delay on Transit |
| | B. Improve travel time reliability* | B1. Duration of Severe Congestion |
| | | B2. Transit person-miles in dedicated/priority ROW |
| Accessibility: Strengthen the region's economy by increasing access to jobs, employees, markets, and destinations for all communities | C. Improve access to jobs* | C1. Access to jobs by car, transit, and bike |
| | | C2. Access to jobs by car, transit, and bike for EEA populations |
| | D. Reduce dependence on driving alone by improving conditions for people accessing transit and using other modes | D1. Quality of access to transit and the walk/bike network |
| | | |
| Resiliency: Improve the transportation system's ability to anticipate, prepare for, and adapt to changing conditions and withstand, respond to, and recover rapidly from disruptions. | E. Improve safety and security of the multimodal transportation system | E1. Potential for safety and security improvements |
| | F. Reduce transportation related emissions | F1. Vehicle Emissions |
| | G. Maintain operations of the regional transportation system during extreme conditions* | G1. Transportation System Redundancy |

*Objectives align with HB599 requirements

Transit may include High Occupancy Vehicles (HOV)

Proposed Calculation Methodology

Each measure will need to be calculated on its own scale based on the methodology set out in the following sections. Regardless of the methodology used, the results of each measure will be normalized and reported on a scale of 1 to 100. The normalization process will assign the highest performance in each measure a score of 100; all other projects will be assigned a score based on how close they are to this highest performance. For example, if Project A reduces delay by the most of any project, it will be assigned 100 points as shown in Table 2 below. The other projects will be assigned a score relative to Project A. While projects will receive scores across all ten performance measures, the same project may not be the highest scoring project across each of the performance measures.

Table 2: Sample of Score Normalization

| Project | Person-Hours of Delay in Autos Reduced | % Relative to Highest Performing Project | Performance Measure A1 Score |
|-----------|--|--|------------------------------|
| Project A | 10,000 | 100% | 100 |
| Project B | 1,018 | 10.18% | 10.18 |
| Project C | 8,101 | 81.01% | 81.01 |

A1. Total Person-Hours of Delay in Autos

Calculated for each link, as the difference between the number of person-hours spent traveling and the hypothetical person-hours that would be spent traveling if all roads were able to operate at free-flow speed. This is summed over the whole day.

$$\sum_{j=1}^j (TravelTime_j - TravelTime_{FreeFlow}) * AutoVolume * AutoOccupancy$$

Where j =number of time periods in the day.

Only people in autos (drivers and passengers) are included in this calculation. Projects of all modes are considered for their impact on congestion, including pedestrian and bike projects. Transit and highway projects can be easily represented within the confines of the mode choice model and the dynamic traffic assignment¹. However, bike and pedestrian projects will also have some impact on congestion levels, by encouraging more people to switch to non-motorized modes.

To account for these impacts, after the mode choice model has created modal trip tables, some additional trips will be shifted from motorized to non-motorized modes. Since most non-motorized trips are short (pedestrian trips tend to be less than a mile and bicycle trips tend to be less than two miles long²) shorter trips will be more likely to be shifted than longer trips. These non-motorized trips (along with the other non-motorized trip productions developed by the model as part of the Trip Generation step) will not be assigned to the network. The number of trips that will be shifted into non-motorized modes will vary by the type/scale of project, and the location of the proposed improvements. There is limited data available on how many trips are shifted to non-motorized modes when improvements to the bike/walk infrastructure are made, but the most complete example comes from California. As shown in Table 3, the number of trips shifted is dependent on the length of the proposed enhancement and the amount of travel occurring on the adjacent/ parallel facilities.

¹ See the Modeling Strategy Memo for a more complete description of how the dynamic traffic assignment will be connected to other modeling steps.

² National Survey of Bicyclist and Pedestrian Behavior and Attitudes, National Highway Traffic Safety Administration (NHTSA), 2008. <https://rosap.nhtsa.gov/view/dot/1845>.

Table 3: Active Transportation Adjustment Factors

| Average Daily Traffic (ADT) | Project Length (one- direction) | Adjustment Factors |
|---|---------------------------------|--------------------|
| ADT ≤12,000 vehicles per day | ≤1 mile | .0019 |
| | >1 mile & ≤2 miles | .0029 |
| | >2 miles | .0038 |
| 12,000<ADT ≤24,000 vehicles per day | ≤1 mile | .0014 |
| | >1 mile & ≤2 miles | .0020 |
| | >2 miles | .0027 |
| 24,000<ADT vehicles per day | ≤1 mile | .0010 |
| | >1 mile & ≤2 miles | .0014 |
| | >2 miles | .0019 |

Source: California Air Resources Board (2020) Quantification Methodology for the CARB STEP Pilot.

The CARB methodology also includes bonus adjustments for improvements located near “key destinations” – although no definition is provided. In a similar spirit, the adjustment factors will be scaled up by 0.003 if the improvement is located within a Regional Activity Center or a Transit Access Focus Area as defined by TPB. The total number of trips shifted from motorized to non-motorized travel will therefore be calculated as:

$$Trips\ Shifted = ADT * (AdjFactor + RACFactor)$$

A2. Total Person-Hours of Delay on Transit

This measure calculates congestion’s impact on delaying transit passengers. It is not meant to account for delay caused by incidents on the transit system, nor as a measure of on-time performance for transit. Because this measure is tied to congestion, it only needs to be calculated on roadway links where bus transit operates in mixed traffic, or for HOVs in dedicated HOV/HOT facilities. Similar to the formulation of A1, it is calculated as the difference in travel times traveling at free-flow speed as compared to actual conditions.

$$\sum_{j=1}^j (TravelTime_j - TravelTime_{FreeFlow}) * TransitPassengerVolume$$

Where j =number of time periods in the day.

Delay for HOVs traveling in dedicated HOV lanes will be included in this measure. Delay incurred by SOVs using HOT facilities will not be included as transit delay, and will instead be included in the auto delay (Performance Measure A1). Travel on rail transit, including Metrorail, are not included in the measure. Projects of all modes are considered for their impact on congestion, including pedestrian and bike projects. The same process outlined for Performance Measure A1 will be conducted to account for the impacts of increased use of non-motorized modes on congestion.

B1. Duration of Severe Congestion

Duration of severe congestion is being used as a proxy for locations on the highway system with major reliability issues. As such, the measure calculates the portion of the day (number of hours) that each link experiences severe congestion – defined as a travel time ratio of 2.0 or higher.

$$\text{Congestion Duration} = \sum \text{Hours}_{sc} * \text{FacilityMiles}$$

Where Hours_{sc} = number of hours with a travel time ratio ≥ 2.0 .

Projects of all modes should be considered for their impact on congestion, including pedestrian and bike projects. The same process outlined for Measure A1 will be conducted to account for the impacts of increased use of non-motorized modes on congestion.

B2. Transit Person-Miles in Dedicated/Prioritized ROW

To measure improvements in transit reliability, this measure quantifies the person-miles of travel occurring on transit in dedicated and prioritized right of way. This will essentially sum the person-miles dedicated/prioritized transitway across the network, including HOVs traveling in dedicated HOV lanes. Links on the network will need to be identified in advance using an attribute that categorizes their level of prioritization. Transit person-miles will then be calculated and summed as shown in Table 4. As shown in the table, travel on fully dedicated running-way is counted as 100 percent of the passenger miles traveled in the calculation. Other treatments, in which prioritization is provided for transit vehicles use a factor to discount the person-miles calculation to account for the fact that prioritized transit must still interact with congestion and other vehicles between intersections (in the case of TSP and queue jumps) or at intersections (in the case of BAT lanes). The factors in Table 4 have been developed based on a literature review of the relative travel time benefits of different types of bus priority treatments.

Table 4: Calculating Person-Miles on Dedicated/Prioritized ROW

| Type of Treatment | Person-Miles Calculation |
|--|---------------------------------------|
| Separate Right-of-Way (e.g. Metrorail, VRE) | Passengers * distance traveled |
| Dedicated Bus Lanes | Passengers * distance traveled |
| Dedicated HOV/HOT Lanes | HOV Passengers * distance traveled |
| Business Access and Transit (BAT) Lanes ³ | Passengers * distance traveled * 0.8 |
| Transit Signal Priority | Passengers * distance traveled * 0.5 |
| Queue Jump Lanes | Passengers * distance traveled * 0.25 |

³ BAT Lanes are curb-side lanes used exclusively by buses and right-turning vehicles, primarily to access businesses and driveways along a corridor.

C1. Access to jobs by car, transit, and bike

For each Traffic Analysis Zone (TAZ⁴) in Northern Virginia, this measure will calculate the number of jobs accessible by:

- Auto in 45 minutes
- Transit (including bus, rail, and on-demand transit) in 60 minutes
- Bike in 30 minutes

These numbers will be summed together for each TAZ to calculate the accessibility to jobs for each TAZ.

$$Accessibility_{TAZ} = Jobs_A + Jobs_T + Jobs_B$$

Where:

$Jobs_A$ =number of jobs accessible within 45 minutes by auto

$Jobs_T$ =number of jobs accessible within 60 minutes by transit

$Jobs_B$ =number of jobs accessible within 30 minutes by bike

Jobs accessible by Auto and Transit will be calculated directly in the model. Jobs accessible by bike will be calculated using ArcGIS Network Analyzer, and will only include jobs accessible on facilities categorized as having a “Bicycle Level of Traffic Stress” of 2 or better. The bicycle network used for analysis includes both on-road and off-road facilities.

A regional value for this measure will be calculated by taking the average of all TAZ values weighted by their total population:

$$\frac{\sum_{TAZ=1}^{3722} Accessibility_{TAZ} * Pop_{TAZ}}{Regional Population}$$

It should be noted that this measure will double and triple count access to jobs that are accessible by multiple modes. This is intentional, and helps account for the benefits of having multiple modal options to complete the same trip.

Figure 2: Equity Emphasis Area Definitions

⁴ For modeling purposes, the region is divided into a series of Traffic Analysis Zones (TAZs) that represent a specific geographic area.

C2. Access to jobs by car, transit, and bike by EEA Populations


This measure will be calculated in exactly the same way as Measure C1, except it will only be calculated for TAZs identified as being part of an Equity Emphasis Areas (EEA). As such, the regional measure will be calculated as the population-weighted average of the TAZ accessibility values only for EEA TAZs.

$$\frac{\sum Accessibility_{TAZ} * Population_{TAZ}}{Regional\ EEA\ Population}$$

EEAs will be defined as any TAZ that is defined as either an MWCOC regional EEA⁵ or as a Northern Virginia Equity Area, as highlighted in Figure 2. Both were defined using similar methodologies with two significant differences:

1. The MWCOC EEAs were defined using average low-income and minority concentrations for the whole metropolitan region, while the Northern Virginia EEAs were identified using Northern Virginia-specific averages.
2. The MWCOC EEAs were defined at the TAZ level, while the Northern Virginia EEAs were defined at the census tract level.

As shown in Figure 2, the results show that some locations were identified as an EEA in both definitions, while some areas were included only one or the other. To be inclusive of both definitions, while maintaining a focus on those areas with the most acute equity needs, TransAction will define EEAs as any TAZ that was defined as an MWCOC EEA or any TAZ for which 50 percent or more of the constituent census tracts were defined as a Northern Virginia EEA. The resulting areas that will be considered as part of this measure are shaded in Figure 3. This EEA definition covers approximately 32% of Northern Virginia's total current population, but more than 41 percent of the region's non-white population and more than 55 percent of the region's population living in poverty, as shown in Table 5Table 5: Percent of Regional Populations Covered by NVTAs Equity Emphasis Areas.

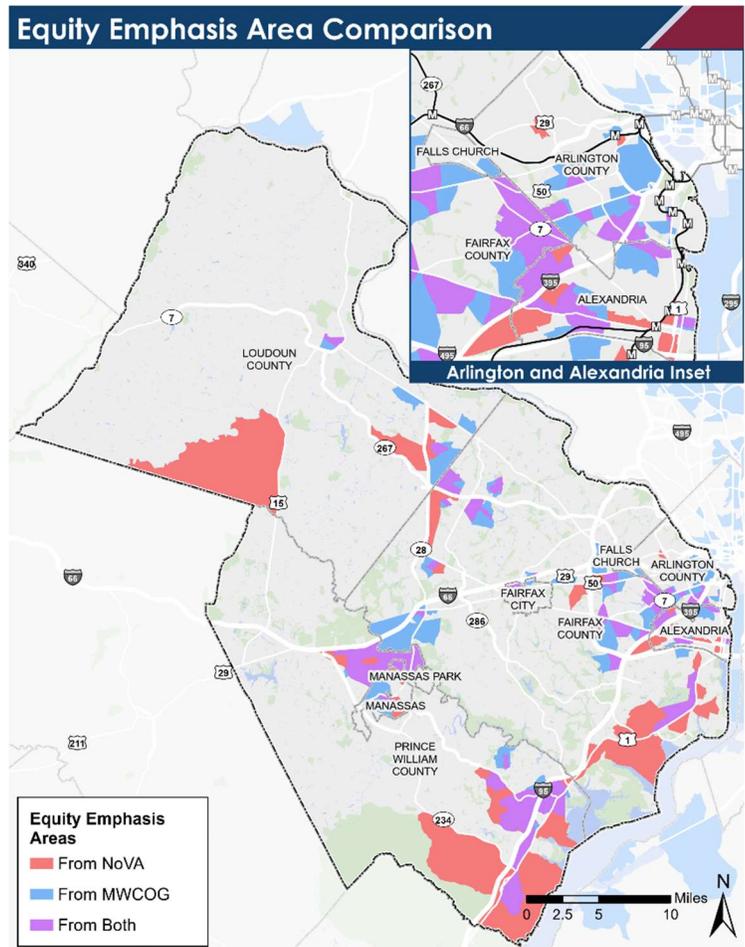

⁵ Equity Emphasis Areas (EEAs) are defined by MWCOC. <https://www.mwcog.org/maps/map-listing/equity-emphasis-areas-eeas/>

Figure 3: NVTA Equity Emphasis Areas for TransAction

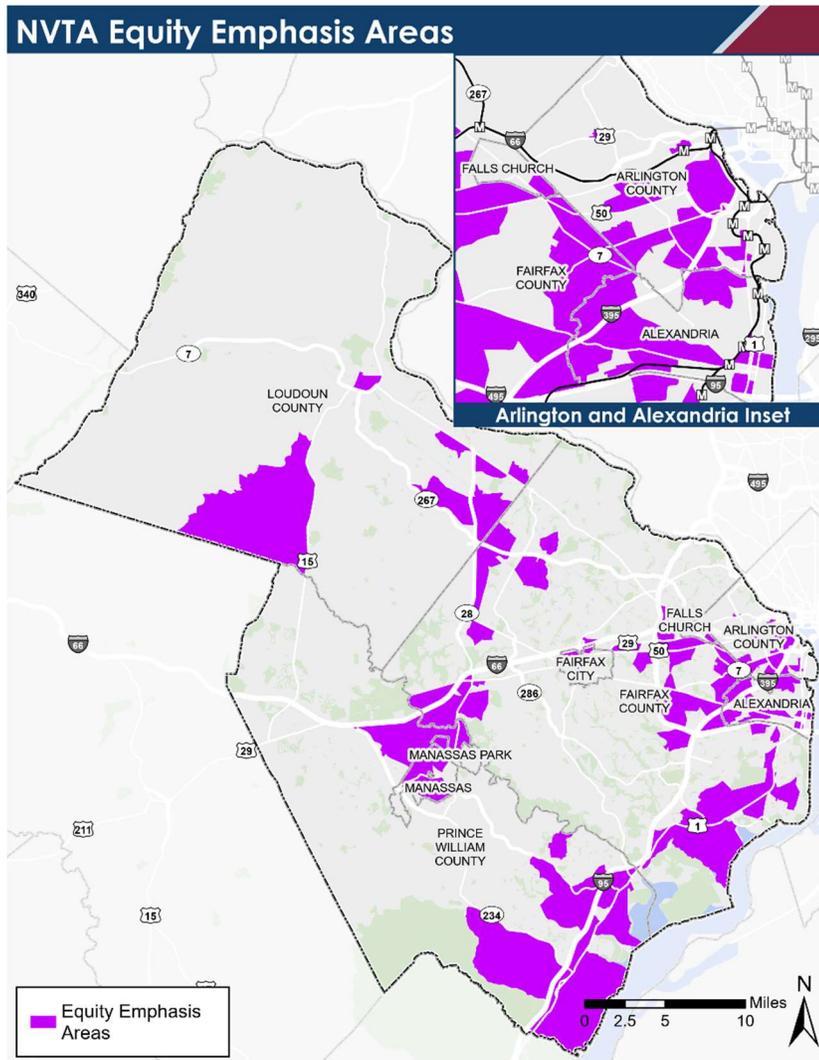


Table 5: Percent of Regional Populations Covered by NVTA Equity Emphasis Areas

| Northern Virginia Regional Statistics | NVTA Equity Emphasis Areas |
|---------------------------------------|----------------------------|
| Total Population (2020) | 31.7% |
| Total Population (2045) | 32.6% |
| Non-White Population | 41.9% |
| Population in Poverty | 55.9% |

D1. Quality of Access to Transit and the Walk/Bike Network

This measure will be qualitative, based on a definition of idealized conditions. Points (ranging from 0 to 4) will be allocated based on what percentage of these idealized amenities would be added as compared to the existing conditions. The idealized conditions envisioned by a score of four include:

Dense grid of arterial streets with wide sidewalks, crosswalks, pedestrian signals; bike lanes on most major arterials and bike sharing stations at frequent intervals; pick-up/drop-off locations for ridesharing/taxis; availability of shared micromobility (e.g. electric scooters); and transit circulator or shuttle bus routes connecting most activity locations and regional transit services, including park-and-ride lots; easy access to major transit stations.

The score will be awarded points ranging from 0 to 4, based on the approximate percentage of the listed features that are being added. For example, the installation of bike lanes, sidewalks and a circulator bus or microtransit service might be awarded a score of two points. The additional inclusion of grade-separated bike lanes and dedicated pick-up/drop-off locations could increase the score to three points. The points will then be weighted by the activity density (population and employment) within a half mile of the proposed improvements to calculate the score for this performance measure.

E1. Potential for Safety and Security Improvements

This measure will be based on the SmartScale safety analysis, which considers the potential for crash reduction in association with the number of current crashes to quantify the number of crashes that will be avoided. Because we do not have the data on the number of crashes at every location, this measure will look only at the potential for crash reduction through the lens of Crash Modification Factors (CMF). For this measure, each type of safety and security improvement will be assigned to a category based on the CMF identified by VDOT. A sample of the CMF factors is shown in Table 6 the full CMF list is incorporated as an appendix. Some additional project types have been added to the list below to incorporate the broader definition of safety being used in TransAction.

Table 6: Sample Categorization of Safety/Security Project Scores

| High (3 points) CMF ≤ 0.33 | Medium (2 points) 0.33 < CMF < 0.67 | Low (1 point) CMF ≥ 0.67 |
|--|---|---|
| Add new sidewalk | Add median | Addition of turn lanes |
| Convert stop/yield control to roundabout | Implement ramp metering | ITS for incident management, variable speed limits, ATM |
| Install pedestrian countdown timer | Adaptive signal control | Roadway widening |
| | Add bicycle lane | High Visibility Crosswalks |
| | Major transit projects that will significantly decrease VMT | Intersection lighting |
| | | Transit projects that will have a smaller impact on VMT |
| | | Improved lighting at transit stops |

Where projects include multiple types of safety improvement, the points will be added together to calculate the project score. (CMFs should not be added, because lower CMFs are better.) For example, projects that add high-visibility crosswalks at three intersections would receive three points. Similarly, a project that added two miles of sidewalk would receive six points. This table can be revised if additional project types need to be included.

F1. Vehicle Emissions

Vehicle emissions will be approximated using Vehicle Miles Traveled (VMT) as a proxy. Total VMT by speed class will be calculated directly from the model. In the No-Build scenario, electrification assumptions will mirror the fleet mix on the ground today to a large extent. The following assumptions will be used:

- 4 percent of light-duty vehicles will be ZEV⁶
- 1 percent of buses will be ZEV⁷
- No heavy trucks will be ZEV

In the future Build network analyses, projects will be included that increase these electrification rates significantly.

Table 7 shows the CO₂ emissions rates for 16 different speed classes and two types of vehicles. For the purpose of calculating this metric, the change in CO₂ emissions will be multiplying the VMT by the appropriate factor.

Table 7: Running CO₂ Emissions Rates (g/mile) by Speed

| Speed (mph) | Light-Duty Vehicles | Buses | Trucks ⁸ |
|-------------|---------------------|----------|---------------------|
| < 2.5 | 1,193.27 | 7,325.32 | 8,160.82 |
| 2.5 – 5 | 650.44 | 4,011.37 | 4,312.85 |
| 5 – 10 | 380.17 | 2,590.43 | 2,586.80 |
| 10- 15 | 297.07 | 2,142.19 | 2,163.03 |
| 15 – 20 | 248.23 | 1,885.14 | 1,874.54 |
| 20 - 25 | 220.00 | 1,727.80 | 1,708.10 |
| 25 – 30 | 203.51 | 1,681.17 | 1,660.44 |
| 30 – 35 | 198.06 | 1,434.48 | 1,430.85 |
| 35 – 40 | 193.92 | 1,390.28 | 1,379.48 |
| 40 – 45 | 190.17 | 1,354.12 | 1,336.62 |
| 45 - 50 | 184.58 | 1,325.92 | 1,273.75 |
| 50 – 55 | 179.37 | 1,302.15 | 1,214.71 |
| 55 - 60 | 175.76 | 1,286.11 | 1,195.29 |
| 60 – 65 | 176.88 | 1,355.77 | 1,245.24 |
| 65 – 70 | 181.83 | 1,421.19 | 1,290.19 |
| > 70 | 189.88 | 1,500.28 | 1,362.54 |

Source: MWCOG/TPB Emissions Analysis for Fairfax County

⁶ <https://cleanairpartners.net/sites/default/files/SemaConnect%20-%20EVs%20in%20the%20DMV%20Region%20Final.pdf>.
Vehicle electrification rates vary by jurisdiction, but are higher closest to DC.

⁷ Current bus fleet in Northern Virginia is approximately 58% diesel, 17% CNG, 1% Battery Electric, and 25% Diesel Hybrid.

⁸ Assumes a truck fleet that is evenly split between single unit and combination trucks.

The total value of the performance measure will be the weighted sum of the non-ZEV VMT as shown below:

$$Emissions = \sum (VMT * Weight)$$

G1. Transportation System Redundancy

This measure is calculated from the model, by calculating the change in person-hours of travel resulting from a 10 percent increase in PM peak hour trip making. The PM peak hour is defined as the hour with the most trips being made in Northern Virginia, and equate to the 5-6 pm hour. This measure is essentially identifying if there is excess capacity in the transportation system by adding additional travel to the busiest hour on the network. In a network with more excess/redundant capacity, the amount of person-hours of travel will be lower than on a network with less redundancy.

TransAction Score Calculation Methodology

The final performance measures will be combined into a single TransAction Score by combining the scores for each individual measure with its assigned weight as follows:

$$TransAction\ Score = \sum PerformanceMeasure * Weight$$

The weights approved by the Authority in December 2021 are shown in Table 8.

Table 8: Performance Measures and Final Weights

| Performance Measure | Weight |
|--|--------|
| A1. Total Person-Hours of Delay in autos | 10% |
| A2. Total Person-Hours of Delay on Transit | 10% |
| B1. Duration of Severe Congestion | 10% |
| B2. Transit person-miles in dedicated/priority ROW | 10% |
| C1. Access to jobs by car, transit, and bike | 10% |
| C2. Access to jobs by car, transit, and bike for EEA populations | 10% |
| D1. Quality of access to transit and the walk/bike network | 15% |
| E1. Potential for safety and security improvements | 10% |
| F1. Vehicle Emissions | 10% |
| G1. Transportation System Redundancy | 5% |

Appendix: Crash Mitigation Factors

Based on the following Crash Mitigation Factors used by SMARTSCALE, the following CMF categories will be applied to Measure E1. Should additional project types be proposed that are not explicitly included in this list, appropriate categories will be added that are consistent with the potential safety benefits.

| Project Extent | Improvement Type/Features | Crash Mitigation Category |
|-----------------------------|--|---------------------------|
| Intersection | Convert stop control to yield control (when warranted) | Med |
| | Convert stop/yield control to signal | Med |
| | Convert stop/yield control to roundabout | High |
| | Convert signal to roundabout | Med |
| | Convert two-way stop control to unsignalized RCUT | Med |
| | Convert signal control to signalized RCUT | Med |
| | Convert signal control to continuous green T signal | Low |
| | Displaced left turn intersection | Low |
| | Median U-turn intersection | Low |
| | Convert pedestal to mast arm | Med |
| | Enhanced signal conspicuity | Low |
| | Convert unsignalized intersection warning beacons from static to dynamic | Low |
| | Install conflict warning system – 4-lane at 2-lane intersection | Low |
| | Install conflict warning system – 2-lane at 2-lane intersection | Low |
| | New turn lane (none present) | Low |
| | Add turn lane (to existing) | Low |
| | Extend turn lane | Low |
| | Median acceleration lane | Low |
| | Add median or close median opening (convert to right-in/right-out) | Med |
| Increase intersection radii | Low | |
| Interchange | At-grade to new interchange | Med |
| | Convert stop-control diamond interchange to DDI | High |
| | Convert signalized diamond interchange to DDI | Med |
| | Convert diamond interchange to SPUI | Med |
| | Change loop ramp to flyover ramp | Volume-based |
| | Non-freeway: replace arterial turns with loops or directional ramps | Med |
| | Add freeway collector-distributor roads | Low |
| | Add freeway independent loop or directional ramp entrances | Low |
| | Extend ramp acceleration lane length | Function |

| | | |
|----------------------------|--|----------|
| | Add entrance ramp lane (1 to 2 lanes) | Low |
| | Add exit ramp lane (1 to 2 lanes) | Low |
| | Extend ramp deceleration lane length 250-500 ft up to 700 ft in total length | Low |
| | Implement ramp metering | Med |
| Bridge | Widen shoulders | Low |
| Freeway Segment | ITS for incident management | Low |
| | ITS for ATM | Low |
| | ITS for variable speed limits | Low |
| | Add auxiliary lanes between ramps | Low |
| | Directional widening 2 to 3 lanes – Rural | Low |
| | Directional widening 2 to 3 lanes – Urban | Low |
| | Directional widening 2 to 4+ lanes – Urban | Low |
| | Directional widening 3 to 4+ lanes – Urban | Low |
| Non-Freeway Segment | Adaptive signal control – Urban Intersection – 3-leg intersection | Med |
| | Adaptive signal control – Urban Intersection – 4-leg intersection | Med |
| | Adaptive signal control – Suburban Intersection | Low |
| | Signal retiming/optimization | Low |
| | ITS for Advanced Traffic Management (ATM) | Low |
| | Close driveway | Low |
| | Widen shoulder | function |
| | Provide median (right-in/right-out only) | Med |
| | Alignment reconstruction | Low |
| | Convert two-way road to one-way road | Med |
| | Addition of two-way left turn lane (four to five lane conversion) | Med |
| | Addition of two-way left turn lane (two to three lane conversion) | Low |
| | Pavement re-utilization (road diet) | Med |
| | Widen 2-lane to multilane divided – Rural | Low |
| | Widen 2-lane to 4-lane divided – Urban | Low |
| | Widen 2-lane to 6-lane divided – Urban | Low |
| | Widen 4-lane to 6+-lane divided – Urban | Low |
| | Widen travel lanes – Rural | Function |
| | Widen travel lanes – Urban | Function |
| | Add or widen shoulder | Function |
| Roadway Segment | Install centerline rumble strips | Med |
| | Install edge rumble strips | Med |
| | Install truck climbing lane | Med |

| | | |
|-----------------------|--|----------|
| | Improve Roadside Hazard Rating (RHR) | function |
| Ped & Pike | Add new sidewalk (does not apply to sidewalk upgrades or widening) | High |
| | Add bicycle lane | Med |
| | Add shared-use path of mixed-use trail | High |
| | Add high-visibility crosswalk (new crosswalk or crosswalk upgrade) | Low |
| | Install countdown pedestrian timer | High |
| | Install leading pedestrian interval (LPI) | Med |
| | Install HAWK | Med |
| | Install RRFB | Med |
| Lighting | Install lighting at intersection | Low |
| | Install lighting at interchange | Low |
| | Install lighting on segment | Low |
| Transit | Install lighting at transit stops | Low |
| | Major transit projects that will significantly decrease VMT | Med |
| | Smaller transit projects that will have a smaller impact on VMT | Low |

Northern Virginia Transportation Authority
Summary of FY2022-2027 Six Year Program Candidate Projects

3/16/2022

| # | Application ID | Jurisdiction / Agency | Project | Fund request | Total project cost | Primary and supporting modal components |
|----|----------------|-----------------------|---|-------------------------|-------------------------|---|
| 1 | ARL-021 | Arlington Co | Ballston-MU Metrorail Station West Entrance | \$ 80,000,000 | \$ 140,000,000 | |
| 2 | FFX-131 | Fairfax Co | Richmond Highway Widening From Mt. Vernon Memorial Highway/Jeff Todd Way to Sherwood Hall Lane | \$ 60,207,038 | \$ 415,000,000 | |
| 3 | FFX-128 | Fairfax Co | Richmond Highway (Route 1) BRT | \$ 80,000,000 | \$ 730,000,000 | |
| 4 | FFX-121 | Fairfax Co | Soapstone Drive Extension: Sunset Hills Road to Sunrise Valley Drive | \$ 73,793,037 | \$ 235,000,000 | |
| 5 | FFX-119 | Fairfax Co | Frontier Drive Extension and Intersection Improvements | \$ 145,200,000 | \$ 180,200,000 | |
| 6 | FFX-126 | Fairfax Co | Fairfax County Parkway Widening: Nomes Court to Route 123 | \$ 108,000,000 | \$ 115,035,882 | |
| 7 | FFX-125 | Fairfax Co | Seven Corners Ring Road Improvements: Arlington Boulevard (Route 50) Westbound Ramp to Castle Place/Sleepy Hollow Road | \$ 94,800,000 | \$ 94,800,000 | |
| 8 | FFX-124 | Fairfax Co | 8 New Battery Electric Buses - Fairfax Connector Buses for Tysons to Franconia Service | \$ 10,000,000 | \$ 10,000,000 | |
| 9 | LDN-025 | Loudoun Co | Route 7 Improvements: Route 9 to Dulles Greenway | \$ 20,000,000 | \$ 130,992,500 | |
| 10 | LDN-028 | Loudoun Co | Loudoun County Parkway Interchange at US 50 | \$ 32,250,000 | \$ 181,152,680 | |
| 11 | LDN-024 | Loudoun Co | Ryan Road Widening (Phase 2): Evergreen Mills Road to Beaverdam Drive | \$ 16,000,000 | \$ 31,500,000 | |
| 12 | LDN-023 | Loudoun Co | Route 7 Corridor ITS Implementation Program | \$ 2,500,000 | \$ 3,777,000 | |
| 13 | PWC-031 | Prince William Co | Construct Interchange at Prince William Parkway and Minnieville Road | \$ 67,500,000 | \$ 70,000,000 | |
| 14 | PWC-030 | Prince William Co | Route 1 at Route 123 Interchange | \$ 61,200,000 | \$ 68,000,000 | |
| 15 | PWC-027 | Prince William Co | Van Buren Road North Extension: Route 234 to Cardinal Drive | \$ 80,000,000 | \$ 82,000,000 | |
| 16 | PWC-029 | Prince William Co | Devlin Road (South) Widening: Linton Hall Road to University Boulevard | \$ 35,000,000 | \$ 40,000,000 | |
| 17 | PWC-028 | Prince William Co | University Boulevard Extension: Devlin Road to Wellington Road | \$ 53,000,000 | \$ 100,000,000 | |
| 18 | PWC-036 | Prince William Co | Old Bridge Road Widening: Colby Drive to Minnieville Road | \$ 25,000,000 | \$ 25,000,000 | |
| 19 | PWC-037 | Prince William Co | Neabsco Road Improvements - Neabsco Road Widening: Route 1 to Daniel Ludwig Drive | \$ 26,500,000 | \$ 26,500,000 | |
| 20 | PWC-035 | Prince William Co | Old Centreville Road Widening: Fairfax County Line to Route 28 | \$ 96,000,000 | \$ 96,000,000 | |
| 21 | ALX-018 | City of Alexandria | West End Transitway Phase 1b: South Van Dorn Street and Bridge Design | \$ 5,000,000 | \$ 40,999,440 | |
| 22 | ALX-020 | City of Alexandria | Alexandria Bike and Pedestrian Trails Construction and Reconstruction: Holmes Run Trail - Dora Kelly Fair-weather Crossing Bridge | \$ 5,000,000 | \$ 5,500,000 | |
| 23 | CFC-008 | City of Falls Church | North Washington Street Multimodal Improvements Project: Great Falls Street to Gresham Place | \$ 22,500,000 | \$ 22,500,000 | |
| 24 | MAN-002 | City of Manassas | Liberia Avenue 3rd Lane Eastbound: Route 28 to Euclid Avenue | \$ 8,851,639 | \$ 8,851,639 | |
| 25 | HND-005 | Town of Herndon | Herndon Parkway Improvements at Worldgate Drive Extension | \$ 4,581,000 | \$ 6,536,000 | |
| 26 | LEE-010 | Town of Leesburg | Interchange Improvements at Route 15 Leesburg Bypass and Edwards Ferry Road | \$ 13,283,839 | \$ 185,074,950 | |
| 26 | | | TOTAL | \$ 1,226,166,553 | \$ 3,044,420,091 | |

Modal Components

- New or improved roadway capacity and/or alignment
- New or improved intersection/interchange
- Improvement/access to Metrorail/VRE commuter rail
- New or improved bus/BRT facility
- New or improved bicycle/pedestrian facility
- New or improved bicycle facility
- New or improved pedestrian facility
- Transportation Technology

First symbol reflects the primary modal component, other symbols denote supporting modal components

